

DA 396-7 Classic
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Design – 598 mm wide trapezoidal canopy
- Powerful – 500 m³/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

EAN: 4002515790014 / Material number: 10558460 /
Old Material Number: 283967501B

Construction type and design	
Appliance colour	Stainless steel
Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
Design	
Variable height available as customisation on request	•
User convenience	
Electronic controls	•
Controls	Light-touch switches with LEDs
Power levels (number without Booster level)	3
Booster levels	1
Programmable Booster level switch-off	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	59,1
Energy efficiency class (A+++ – D)	C
Grease filtering efficiency class	A
Fluid dynamic efficiency class	D
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in lx	360 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	150
Air throughput in Level 2 (m ³ /h) according to EN 61591	250
Air throughput in Level 3 (m ³ /h) according to EN 61591	350
Air throughput in booster level 1 (m ³ /h)	500
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	47,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	55,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	62,0

DA 396-7 Classic
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515790014 / Material number: 10558460 /
Old Material Number: 283967501B

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 26,0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 34,0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 40,0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 47,0

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591 100

Air throughput in Level 2 (m³/h) according to EN 61591 150

Air throughput in Intensive level (m³/h) according to EN 61591 350

Air throughput in Level 3 (m³/h) according to EN 61591 250

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 48,0

Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3 68,0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 55,0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 61,0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 34,0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 41,0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 47,0

Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13 53,0

Safety

Safety switch-off •

Technical data

Overall hood height for extraction mode and external in mm 695–1015

Overall height for recirculation mode cooker hoods in mm 825–1145

Overall height for vented and external in in. (mm) 695

Canopy width in mm 598

Overall height for extraction mode and external mode cooker hoods in mm 1015

Canopy height in mm 120

Overall height for recirculation in in. (mm) 825

Canopy depth in mm 520

Overall height for recirculation mode cooker hoods in mm 1145

Net weight in kg 21,0

Length of supply lead in m 1,5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

Number of phases 1

Total rated load in kW 0,12

DA 396-7 Classic

Wall mounted cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515790014 / Material number: 10558460 /
Old Material Number: 283967501B

Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

Installation notes

Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•


Optional accessories

Active charcoal filter, can be reactivated	DKF 12-R
--	----------

DA 396-7 Classic

Wall mounted cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

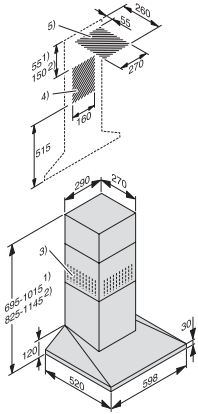

DA 396-6 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)