



# Zaptec | Integration Guide

## Before you start:

- ⚠ A Perific product must be installed and configured for measuring total power consumption. The charging box(es) must be commissioned and registered in Charge Amps's system.

**1**

In the Perific app, go to Settings, Licenses, Scan new license.  
Scan the QR code on the included integration license.






4

Enter main fuse size.  
Enter a safe charge level if the device goes offline.



5

Ensure the correct product for measuring total consumption is selected.  
Then press Save.  
The reporter is now configured.

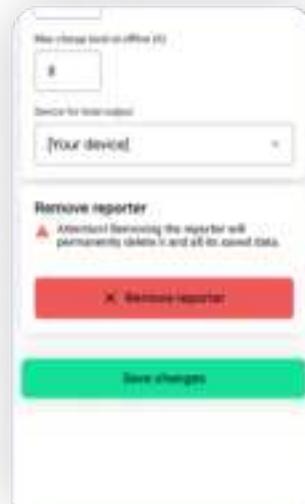

6

Perific is now integrated with Zaptec!

The charging box(es) in the installation you have integrated with Perific now retrieve power values from Perific, which enables a safe and efficient power output.



7

## Get Zaptec ID manually

**⚠** Check in the user account, under Installation → Settings → Power management:

- that SMART ECO MODE is disabled.
- that Manual Power Control is selected as power control.

In the user account, under Installation → Permissions, press "Give permissions":

- Add the account `zapteccontrol@enegic.com` with Owner and Service rights.

In the Zaptec portal: Navigate to Installation → Settings → Details, press "Copy installation ID". The ID should then be entered into the Enegic app when configuring the Reporter.